




# 62311-1-1 Setup Case Datasheet

104008-0010-H

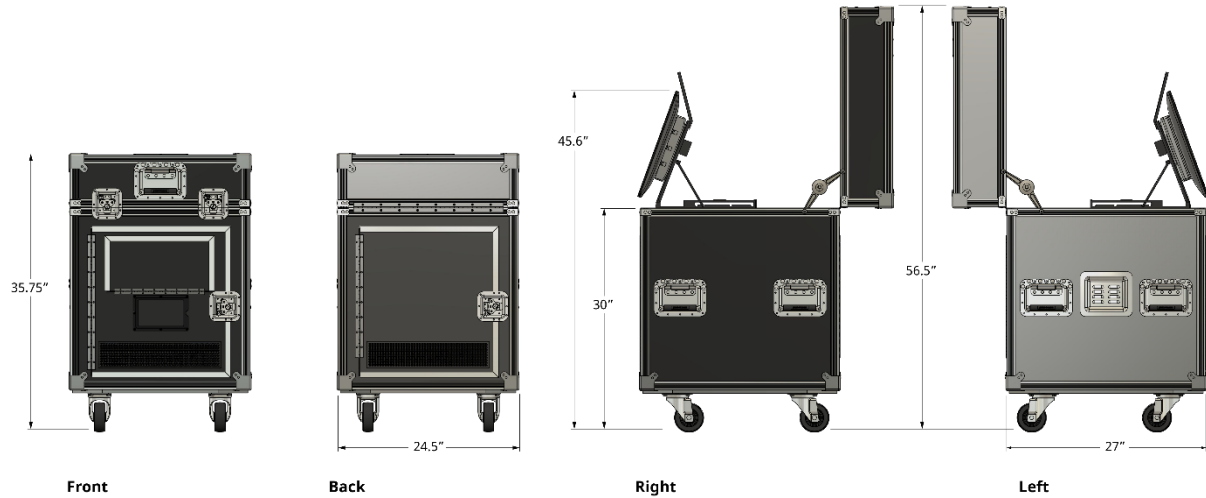

## Physical Characteristics

<b>Dimensions</b>	Height (closed): 25.75" Height (open): 56.5" Width: 24.5" Depth: 27" Ground clearance: 4.5"
<b>Enclosure Material</b>	3/8" plywood with laminated ABS plastic finish 6000 series aluminum extrusions
<b>Enclosure Finish</b>	Matte black ABS and satin aluminum
<b>Weight</b>	Setup case (no components): 107 lbs. Weight with all ClearAccess components: approx. 205 lbs. ClearAccess UPS: 55.8 lbs. Elo display: 7 lbs. Printer: 26.6 lbs. Display kickstand: 5.5 lbs.
<b>ClearAccess Compatibility</b>	ClearAccess 2.2

<b>Wheels</b>	3.5" swivel rubber casters with total lock brakes
---------------	---

## Security

<b>Tamper Evident</b>	Can be used with tamper evident ties and seals
-----------------------	--

## Power



<b>ClearAccess UPS</b>	Capacity: 1500 W
------------------------	------------------

<b>Built-in Power Cable</b>	10' long NEMA 5-15P <i>Use only with 120V outlets</i>
-----------------------------	---

## Storage and Handling

<b>Storage</b>	Each setup case occupies approximately 12.9 ft <sup>3</sup> Ensure all wheels are locked when the setup case is in storage.
----------------	--

<b>Environmental Conditions</b>	Should be stored under climate control for temperature and humidity 50° to 95° and up to 80% relative humidity Tested to withstand -4° to 140° F Can tolerate humidity equivalent to the procedure of MIL-STD-810D, Method 507.2, Procedure I-Natural Hot-Humid
---------------------------------	---

<b>Handling</b>	 <p><b>Lifting hazard:</b> single person lift could cause injury. Get help when lifting the ClearAccess Setup Case.</p>  <p><b>Pinch point warning:</b> Use handle when collapsing display kickstand, keep hands clear of mechanism.</p> <p>Ensure all wheels are locked when the setup case is in use or in storage.</p>
-----------------	---

## Certification

<b>ClearVote</b>	Please refer to Clear Ballot's Approved Parts Lists for the ClearVote version(s) under which this product is certified.
------------------	---